

Home > Tools > Babel Fish Translation > World Keyboard - Translated Text



## Babel Fish Translation ®

## Help

#### In English:

the magnetic alternating field, which is taken up by the coil 9, produced by coil 11, produces therein an alternating voltage, as a result of the parallel switched condenser 9a arises a resonant circuit, which is co-ordinated with frequeny the magnetic alternating field. of reel delivered alternating voltage an electric rectifier 6 one supplies, from it the operating voltage for the modulator 7a as well as over the line 5 for the circuit part 2 one produces.

## Search the web with this text


Translate again - Enter up to 150 words



Add Babel Fish Translation to your site.

Tip: If you do not want a word to be translated add a x on each side SYSTRAN of it. Eg: I love xPinkx xFloydx





**Calling Cards** World Travel Language School Cellular Phones & Learn German Germany Travel

**Babel Fish Translation To** 

Translate e-mails!

Add translation to you

Seamless translation p for MSOffice - Word, Po Excel, Internet Explorer Outlook!



**Business Services** 

Submit a Site

About AltaVista

Privacy Policy



Home > Tools > Babel Fish Translation > World Keyboard - Translated Text (©)


## Babel Fish Translation ®

## In English:

Transaction data delivered by this circuit 2 over the line 3a are supplied to the modulator 7a, which reels a load modulation and/or the resonant circuit of the 9, 9a produced, for example as both coil connections a parallel switched transistor are switched on and off



Translate again - Enter up to 150 words



Add <u>Babel Fish Translation</u> to your site. Tip: You can now translate framed pages.



**Global Services** 

Calling Cards
World Travel
Language School
Cellular Phones
Learn German
Germany Travel

**Babel Fish Translation To** 

Translate e-mails!

Add translation to you

Seamless translation profession of MSOffice - Word, Po Excel, Internet Explorer Outlook!





Business Services Submit a Site About AltaVista Privacy Policy Help




Home > Tools > Babel Fish Translation > World Keyboard - Translated Text (©)

## **Babel Fish Translation** ®

Help

#### In English:

If the load of the resonant circuit 9, 9a is changed, changes also the river, which flows by the coil 11 coupled with the coil 9, and which become on the line 3a produced data on the line 17a leading to the data processing equipment 18 recovered.



**Global Services** 

**Calling Cards** World Travel

Learn German

Language School Cellular Phones &


# Search the web with this text

## Translate e-mails!

Add translation to you

**Babel Fish Translation To** 

Seamless translation r for MSOffice - Word, Po Excel, Internet Explorer Outlook!



Add Babel Fish Translation to your site.

Tip: If you do not want a word to be translated add a x on each side SYSTRAN of it. Eg: I love xPinkx xFloydx





**Business Services** Submit a Site About AltaVista Privacy Policy Help



Home > Tools > Babel Fish Translation > World Keyboard - Translated Text

## Babel Fish Translation ®


#### Help

## In English:

The mouse 1 contains a ball 36, which turns with the movement of the mouse 1 over the document 20 in this example, and turn converted by that here as block represented circuit part of 2 in data and supplied which to the circuit part of 4.



Translate again - Enter up to 150 words



Add Babel Fish Translation to your site.

Tip: Click the "World Keyboard" link for a convenient method of entering accented or Russian characters.





**Calling Cards** World Travel 8 Language School Cellular Phones & Learn German Germany Travel

**Babel Fish Translation To** 

Translate e-mails!

Add translation to you

Seamless translation r for MSOffice - Word, Po Excel, Internet Explorer Outlook!



**Business Services** Submit a Site About AltaVista Privacy Policy



Home > Tools > Babel Fish Translation > Translated Text ( Translat

## Babel Fish Translation ®

#### In English:

In this way the energy will ubertragen for the enterprise of the circuit from the circuit parts of 2 and 4 by the magnetic field of the coil 11 to the coil 9, as by the arrow 8a is suggested, protecting data more uber this way in accordance with off the arrow eb in veiden directions ubertragen to become to konnen.

## Search the web with this text

#### Translate again - Enter up to 150 words

Auf diese Weise wird die Energie zum Betrieb der Schaltung aus den Schaltungsteilen 2 und 4 durch das Magnetfeld von der Spule 11 zur Spule 9 ubertragen, wie durch den Pfeil 8a angedeutet ist, wahrend Daten uber diesen Weg gemaB dem Pfeil eb in veiden Richtungen ubertragen werden konnen.

Use the World Keyboard to enter accented or Cyrillic characters.





#### Add Babel Fish Translation to your site.

**Tip:** Compare the translation with the original by clicking the "View Original Language" link on a translated web page.





**Global Services** 

Calling Cards
World Travel
Language School
Cellular Phones
Learn German
Germany Travel

**Babel Fish Translation To** 

Translate e-mails!

Add translation to you

Seamless translation profession MSOffice - Word, Po Excel, Internet Explorer Outlook!



Business Services Submit a Site About AltaVista Privacy Policy Help

## PATENT ABSTRACTS OF JAPAN

(11)Publication number:

2001-159948

(43) Date of publication of application: 12.06.2001

(51)Int.CI.

G06F 3/033

(21)Application number: 11-376161

(71)Applicant : BAITEKKUSU:KK

(22)Date of filing:

01.12.1999


(72)Inventor: SHIMONO HEIHACHI

## (54) BATTERYLESS CORD-FREE MOUSE DEVICE

## (57)Abstract:

PROBLEM TO BE SOLVED: To wirelessly transmit the information of a computer mouse having cord-free constitution and to wirelessly transmit power supply for the mouse to the mouse.

SOLUTION: An oscillator is constituted by unifying the cord-free mouse with a mouse pad, and the oscillation frequency of the oscillator is determined by a constant of a resonance circuit in the mouse. Part of oscillation voltage is rectified in the mouse and used for mouse power supply. The information of an encoder or a button switch in the mouse is encoded by a CPU built in the mouse. The HI/LO voltage of the code is applied to a varactor diode constituting part of the resonance circuit to frequency-modulate the oscillation frequency. The

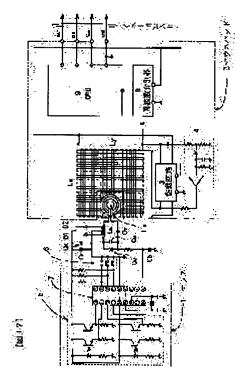

modulated wave is taken out by the mouse pad side and demodulated by a frequency discriminator built in the mouse pad and the demodulated wave is transmitted to a computer through a CPU built in the mouse pad.

#### **LEGAL STATUS**

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office